

Fig. C269, H269 MotoBalance (without Drain and Strainer)

FEATURES AND BENEFITS

- Ultra compact, prefabricated unit
- Provides flow control, measurement, flushing and isolation
- Can be tailored to customer's specifications
- For use with Chilled Water, LTHW and MTHW
- Reduces time, costs and specification risks

MATERIAL SPECIFICATION

Component	Material	Specification BS EN
1. H-Body (DN15 - DN20)	Bronze	1982 CC491K
2. Fig. 1832/M/L DRV	Bronze	1982 CC491K
3. Fig. 100 Ball Valve	DZR Brass	12165 CW602N
4. Union Connector	DZR Brass	12165 CW602N
5. Union Nut	Brass	12164 CW614N



Fig. C269 for chilled water



Fig. H269 for heated water

PRESSURE/ TEMPERATURE RATING

PN16 -10 to 120°C

TEST PRESSURES (HYDRAULIC)

Tested to BS EN 12266-1

SPECIFICATION

Both modules can adopt a left or right-handed configuration.

SERVICE RATING

Figure C269 is suitable for chilled water applications.

Figure H269 is suitable for LTHW and MTHW applications.

DIMENSIONAL DRAWINGS

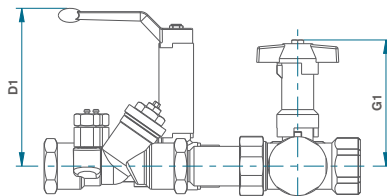


Fig. C269





Fig. H269

DIMENSIONS AND WEIGHTS

Nom Size	mm	1/2 female	3/4 female
A	mm	125	125
B	mm	120	125
D	mm	45	54
D1	mm	110	119
F	mm	168	175
G	mm	43	43
G1	mm	85	85
H	mm	80	80
J	mm	42	42
Weight	kg	1.75	2.04

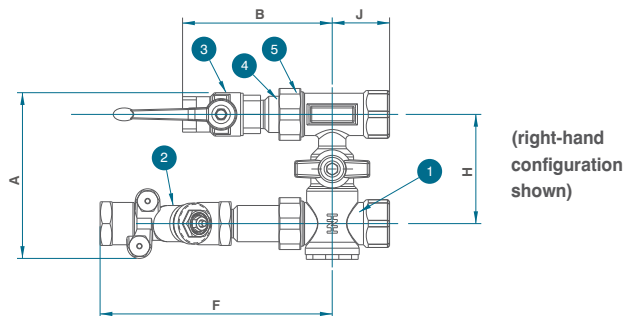

Every effort has been made to ensure that the information contained in this publication is accurate at the time of publishing. Hattersley Ltd assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.